



#### FEATURES

- RoHS compliant
- Efficiency up to 80%
- Power density up to 0.85W/cm<sup>3</sup>
- Dual output from a single input rail
- UL 94V-0 package material
- No heatsink required
- Footprint from 1.17cm<sup>2</sup>
- Industry standard pinout
- Power sharing on output
- 1kVDC isolation
- 24V & 48V input
- 5V, 9V, 12V and 15V output
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required

#### DESCRIPTION

The NMA series of DC/DC converters are the standard buliding blocks for on-board distributed power systems. They are ideally suited for providing dual rail supplies on primarily digital boards with the added benefit of galvanic isolation to reduce switching noise. All of the rated power may be drawn from a single pin provided the total load does not exceed 1 watt.

# NMA 24V & 48V Series

Isolated 1W Dual Output DC/DC Converters

SFL	ECT	ION	GII	IDF

SELECTION GU	IDE						
Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>	Package Style
	V	V	mA	%	pF	kHrs	
NMA2405DC	24	±5	±100	70	39	194	
NMA2409DC	24	±9	±55	77	85	129	DIP
NMA2412DC	24	±12	±42	80	65	134	DIP
NMA2415DC	24	±15	±33	80	95	101	
NMA2405SC	24	±5	±100	70	39	194	
NMA2409SC	24	±9	±55	77	85	129	CID
NMA2412SC	24	±12	±42	80	65	134	SIP
NMA2415SC	24	±15	±33	80	95	101	
NMA4805DC	48	±5	±100	70	26	206	
NMA4809DC	48	±9	±55	80	38	174	חוח
NMA4812DC	48	±12	±42	80	52	139	DIP
NMA4815DC	48	±15	±33	80	56	104	
NMA4805SC	48	±5	±100	70	26	206	
NMA4809SC	48	±9	±55	80	38	174	CID
NMA4812SC	48	±12	±42	80	52	139	SIP
NMA4815SC	48	±15	±33	80	56	104	1

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Voltage range	Continuous operation, 24V input types	21.6	24	26.4	V
	Continuous operation, 48V input types	43.2	48	52.8	V

OUTPUT CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Rated Power <sup>2</sup>	$T_A=0^{\circ}C$ to $70^{\circ}C$			1	W	
Voltage Set Point Accuracy	See tolerance envelope					
Line regulation	High VIN to low VIN			1.2	%/%	
Lood Degulation	10% load to rated load, 5V output types			15	%	
Load Regulation	10% load to rated load, all other output types			10	%	
Ripple and Noise	BW=DC to 20MHz, all input types			150	mV p-p	

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection <sup>3</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	450mW
Input voltage VIN, NMA24 types	28V
Input voltage V <sub>IN</sub> , NMA48 types	54V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

- 2. See derating graph.
- 3. Supply voltage must be discontinued at the end of the short circuit duration.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.



www.murata-ps.com

### muRata Ps Murata Power Solutions


## NMA 24V & 48V Series

Isolated 1W Dual Output DC/DC Converters

ISOLATION CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Isolation test voltage	Flash tested for 1 second	1000			VDC	
Resistance	Viso= 500VDC	10			GΩ	

GENERAL CHARACTERISTICS						
Parameter	Conditions		Min.	Тур.	Max.	Units
Switching frequency	All input types			100		kHz
TEMPERATURE CHARACTERISTICS						

TEMIFENATURE URANAUTERISTUS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	0		70	°C
Storage		-55		150	U
Cooling	Free air convection				

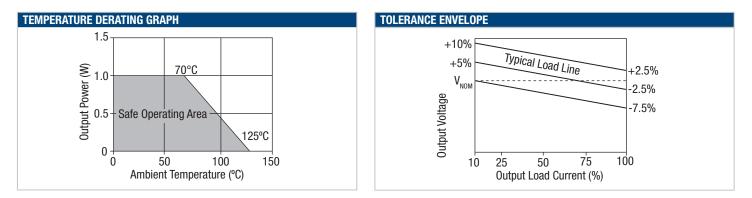

#### **TECHNICAL NOTES**

#### **ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMA series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMA series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

#### **REPEATED HIGH-VOLTAGE ISOLATION TESTING**


It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMA series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.



## NMA 24V & 48V Series

Isolated 1W Dual Output DC/DC Converters

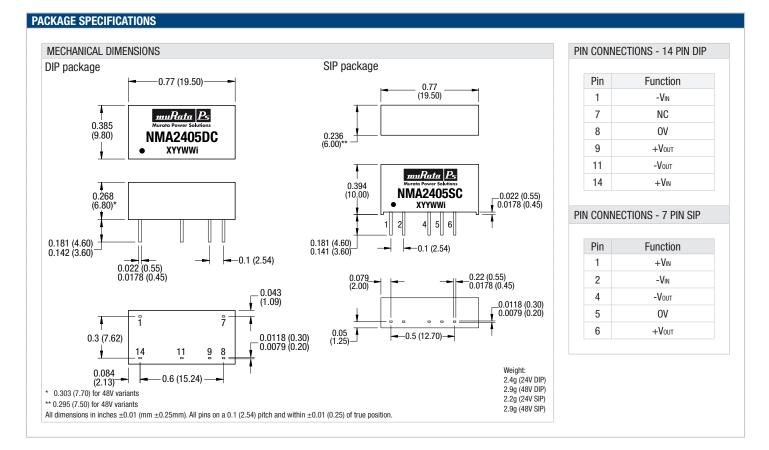

#### **RoHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.


For further information, please visit www.murata-ps.com/rohs





### NMA 24V & 48V Series

Isolated 1W Dual Output DC/DC Converters

#### PACKAGE SPECIFICATIONS (continued)

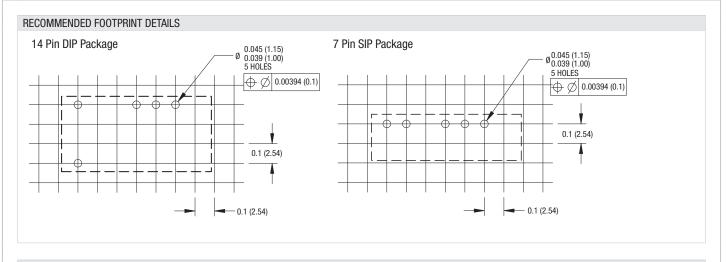



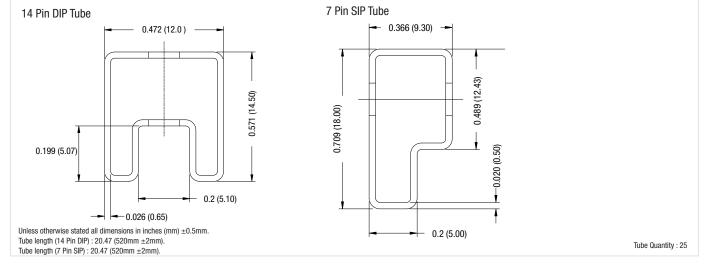

### muRata Ps Murata Power Solutions

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2008 Murata Power Solutions, Inc.

Ľ	USA:	Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com			
Canada: Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com					
L	UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com			
L	France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com			
L	Germany:	München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com			
	Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp			
	China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com			

Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232