
SLLS081B - JANUARY 1971 - REVISED MAY 1995

- Meets or Exceeds the Requirement of ANSI EIA/TIA-232-E and ITU Recommendation V.28
- Withstands Sustained Output Short Circuit to Any Low-Impedance Voltage Between -25 V and 25 V
- 2-μs Max Transition Time Through the 3-V to -3-V Transition Region Under Full 2500-pF Load
- Inputs Compatible With Most TTL Families
- Common Strobe Input
- Inverting Output
- Slew Rate Can Be Controlled With an External Capacitor at the Output
- Standard Supply Voltages . . . ±12 V


#### description

The SN75150 is a monolithic dual line driver designed to satisfy the requirements of the standard interface between data terminal equipment and data communication equipment as defined by ANSI EIA/TIA-232-E. A rate of 20000 bits per second can be transmitted with a full 2500-pF load. Other applications are in data-transmission systems using relatively short single lines, in level translators, and for driving MOS devices. The logic input is compatible with most TTL families. Operation is from 12-V and -12-V power supplies.

The SN75150 is characterized for operation from  $0^{\circ}$ C to  $70^{\circ}$ C.




### logic symbol<sup>†</sup>



<sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

#### logic diagram (positive logic)




PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



SLLS081B - JANUARY 1971 - REVISED MAY 1995

#### schematic (each line driver)

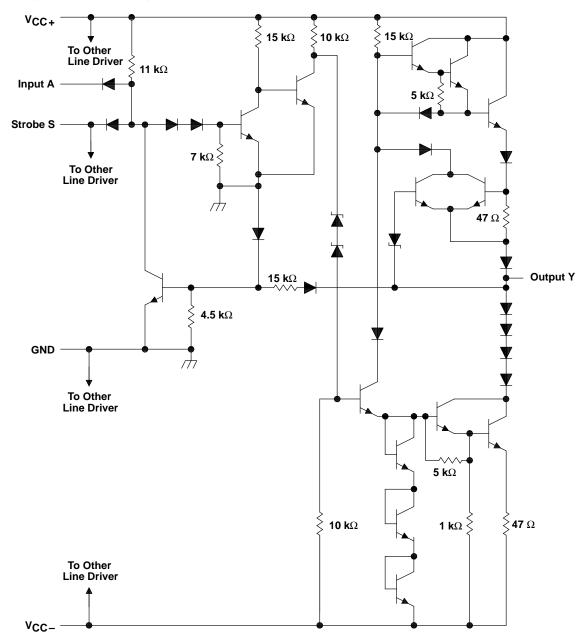

Resistor values shown are nominal.



SLLS081B - JANUARY 1971 - REVISED MAY 1995

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage, V <sub>CC+</sub> (see Note 1)	
Supply voltage, V <sub>CC</sub>	–15 V
Input voltage, V	15 V
Applied output voltage	±25 V
Continuous total power dissipation	. See Dissipation Rating Table
Operating free-air temperature range, T <sub>A</sub>	0°C to 70°C
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Voltage values are with respect to network ground terminal.

DISSIPATION RATING TABLE						
PACKAGE	T <sub>A</sub> ≤ 25°C POWER RATING	DERATING FACTOR ABOVE T <sub>A</sub> = 25°C	T <sub>A</sub> = 70°C POWER RATING			
D	725 mW	5.8 mW/°C	464 mW			
Р	1000 mW	8.0 mW/°C	640 mW			

#### recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V <sub>CC+</sub>	10.8	12	13.2	V
Supply voltage, V <sub>CC –</sub>	-10.8	-12	-13.2	V
High-level input voltage, VIH	2		5.5	V
Low-level input voltage, VIL	0		0.8	V
Driver output voltage, VO			±15	V
Operating free-air temperature, T <sub>A</sub>	0		70	°C



SLLS081B - JANUARY 1971 - REVISED MAY 1995

#### electrical characteristics over recommended operating free-air temperature range, V<sub>CC $\pm$ </sub> = ±13.2 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	түр†	MAX	UNIT		
VOH	High-level output voltage		$ \begin{array}{ll} V_{CC+} = 10.8 \ V, & V_{CC-} = -10.8 \ V, \\ V_{IL} = 0.8 \ V, & R_L = 3 \ k\Omega \ \ to \ 7 \ k\Omega \end{array} $		5	8		V	
V <sub>OL</sub>	Low-level output voltage (see Note 2)		V <sub>CC+</sub> = 10.8 V, V <sub>IH</sub> = 2 V,	$V_{CC-} = -10.8 \text{ V},$ R <sub>L</sub> = 3 k $\Omega$ to 7 k $\Omega$		-8	-5	V	
I	Lligh lovel input ourrest	Data input				1	10	μA	
I <sub>IH</sub> Hig	High-level input current	Strobe input				2	20		
lu.	Low-level input current	Data input				-1	-1 -1.6	mA	
IIL Lo	Low-level input current	Strobe input	$V_{l} = 0.4 V$			-2	-3.2	mA	
			V <sub>O</sub> = 25 V			2	2 8		
100	Short-circuit output current‡		$V_{O} = -25 V$			-3	-8	mA	
los	Shon-circuit output current+		V <sub>O</sub> = 0,	V <sub>I</sub> = 3 V	10	15	30	ША	
		V <sub>O</sub> = 0,	$V_{I} = 0$	-10	-15	-30			
ICCH+	Supply current from $V_{CC+}$ , I	nigh-level output	$V_{I} = 0,   R_{L} = 3 k\Omega,$ $T_{A} = 25^{\circ}C$			10	22	mA	
ICCH-	Supply current from V <sub>CC</sub> _, H	nigh-level output				-1	-10		
ICCL+	Supply current from $V_{CC+}$ , I	ow-level output	$V_{I} = 3 V,$ $R_{L} = 3 k\Omega,$ $T_{A} = 25^{\circ}C$			8	17		
ICCL-	Supply current from V <sub>CC</sub> , I	ow-level output				-9	-20	mA	

<sup>†</sup> All typical values are at  $V_{CC+}$  = 12 V,  $V_{CC-}$  = -12 V,  $T_A$  = 25°C. <sup>‡</sup> Not more than one output should be shorted at a time.


NOTE 2: The algebraic convention, in which the less positive (more negative) limit is designated as minimum, is used in this data sheet for logic levels only, e.g., when -5 V is the maximum, the typical value is a more negative voltage.

### switching characteristics, $V_{CC+} = 12 V$ , $V_{CC-} = -12 V$ , $T_A = 25^{\circ}C$ (see Figure 1)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
<sup>t</sup> TLH	Transition time, low-to-high-level output	C <sub>L</sub> = 2500 pF,	$C_L = 2500 \text{ pF},  ext{ R}_L = 3 \text{ k}\Omega \text{ to } 7 \text{ k}\Omega$	0.2	1.4	2	μs
t <sub>THL</sub>	Transition time, high-to-low-level output			0.2	1.5	2	μs
<sup>t</sup> TLH	Transition time, low-to-high-level output	C <sub>I</sub> = 15 pF,	$R_L = 7 k\Omega$		40		ns
t <sub>THL</sub>	Transition time, high-to-low-level output	С <u>[</u> = 15 рг,			20		ns
<sup>t</sup> PLH	Propagation delay time, low-to-high-level output	- C <sub>L</sub> = 15 pF,	$R_L = 7 k\Omega$		60		ns
<sup>t</sup> PHL	Propagation delay time, high-to-low-level output				45		ns



SLLS081B - JANUARY 1971 - REVISED MAY 1995

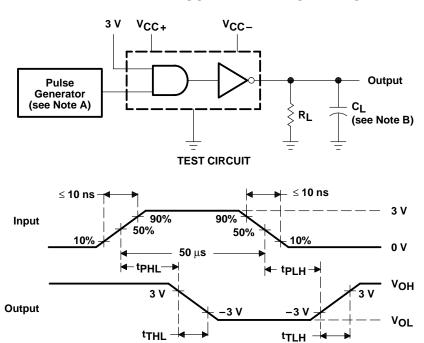

### PARAMETER MEASUREMENT INFORMATION





Figure 1. Test Circuit and Voltage Waveforms

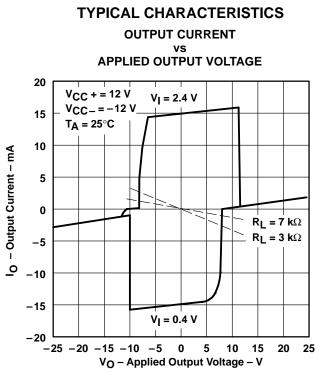

SLLS081B - JANUARY 1971 - REVISED MAY 1995





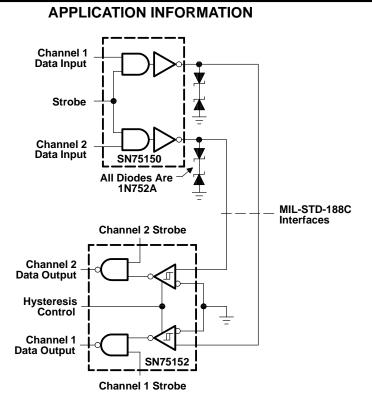


Figure 3. Dual-Channel Single-Ended Interface Circuit Meeting MIL-STD-188C, Paragraph 7.2.



#### **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.


In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.

Copyright © 1995, Texas Instruments Incorporated

# **MECHANICAL DATA**

MPDI001A - JANUARY 1995 - REVISED JUNE 1999

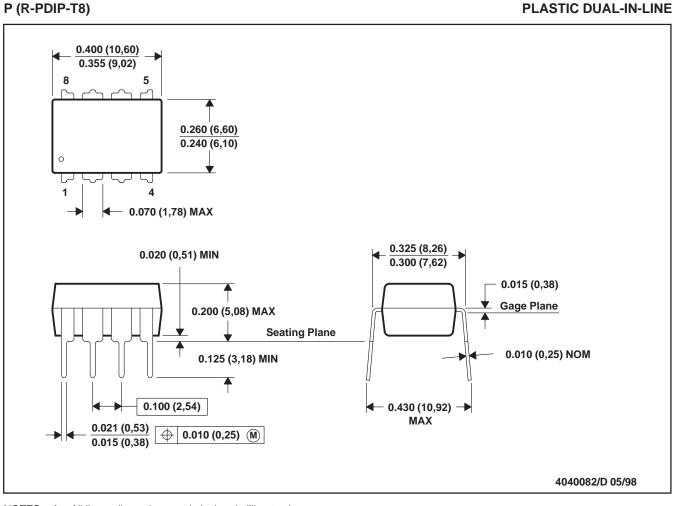

- NOTES: A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001

For the latest package information, go to http://www.ti.com/sc/docs/package/pkg\_info.htm

