

ATE Spring Probes


Two-Part Test Probes for 2.54mm Pitch

- Two piece test-probe – probe can be replaced when damaged or worn out, without re-soldering to test jig.
- Sleeve can be assembled as either interference fit to a test jig, and wire attached to the rear bore, or clearance fit and soldered to a PCB for electrical connection.
- Long length probe bodies with 6.3mm travel, for 2.54mm minimum pitch.




Mechanical

Full travel: 6.30mm
 Spring force
 At full travel: 3.43N
 At 2/3 travel: 2.26N

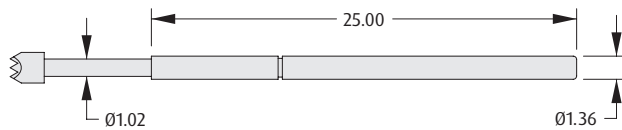


SPEAR HEAD

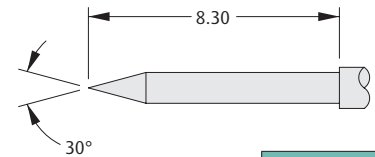


ORDER CODE
P25-0126

TULIP HEAD




ORDER CODE
P25-1726

CROWN HEAD

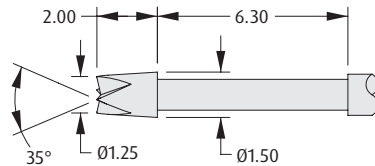



ORDER CODE
P25-3226

SERRATED HEAD

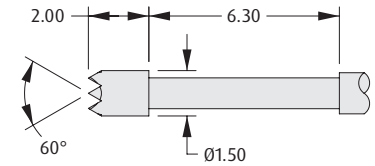

ORDER CODE
P25-4026



WIRE WRAP TAIL SLEEVE

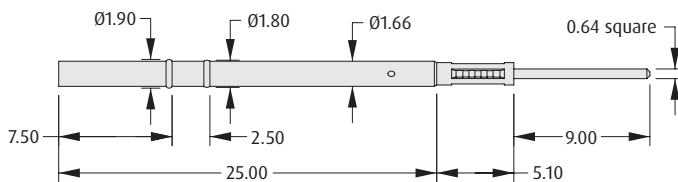

ORDER CODE
S25-346

SOLDER BARREL SLEEVE INSTEAD

- Suitable for use with 22 to 30AWG wire.

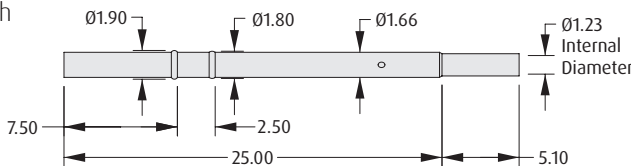

ORDER CODE
S25-546

All dimensions in mm.