







PA251 – 5.08


**Rising clamp terminal block,
angled entry 45°**



TECHNICAL DATA

	IEC	UL / CSA	
Pitch	5.08 mm	0.2"	
Poles	2, 3		
Versions	angled entry 45°		
Ratings	450V - 16A	300V - 15A	
Wire size	2.5 sqmm	26 ÷ 12 AWG	
Working Temperature	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 284 °F	
Plastic Material	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C		
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M3 Screw made in zinc plated steel		
Screw Torque	0.5 Nm	7 lb-in	
Accessories	CAR-IND		
Approvals	File Nr.	Ratings (sqmm/AWG – V – A – T)	Standard References
	EN 4332	2.5sqmm - 450V - 16A - 85 °C	EN60998-1; EN60998-2-1
	121269 ÜG	2.5sqmm - 450V - 16A - 85 °C	DIN EN60998-1; DIN EN60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 7	26 ÷ 12AWG - 300V - 15A - 140 °C	UL1059
	LR 40455	26 ÷ 12AWG - 300V - 15A	CSA C22-2 N.158-1987; E.C.N 584B

DIMENSIONAL
DRAWING

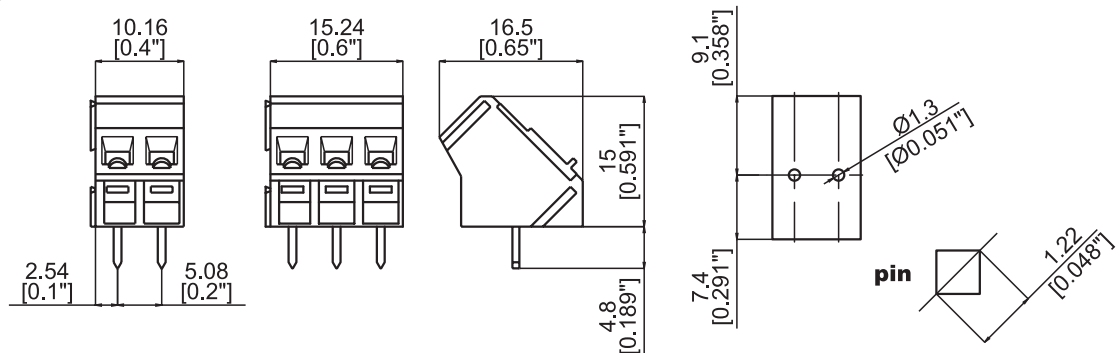





PA251 – 5.08

ACCESSORIES

CAR-IND

Self adhesive label of ten symbols.
Package of 10 sheets each with 25 labels.



PACKAGING

Type	P-N	Pack
PA 251/5.08/2	00110302	100
PA 251/5.08/3	00110303	100

CAR-IND

Type	P-N	Pack
L1, L2, L3, N, PE, U, V, W, N,	00080498	250
Neutral	00080499	250
1+ 10	00080500	250
11+ 20	00080501	250
21+ 30	00080502	250
31+ 40	00080503	250
41+ 50	00080504	250
51+ 60	00080505	250
61+ 70	00080506	250
71+ 80	00080507	250
81+ 190	00080508	250
91+ 100	00080509	250

PALLETS

Europallets









PA251 - 10.16


**Rising clamp terminal block,
angled entry 45°**



TECHNICAL DATA

	IEC	UL / CSA	
Pitch	10.16 mm	0.4"	
Poles	1, 2		
Versions	angled entry 45°		
Ratings	450V - 16A	300V - 15A	
Wire size	2.5 sqmm	26 ÷ 14 AWG	
Working Temperature	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 284 °F	
Plastic Material	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C		
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M3 Screw made in zinc plated steel		
Screw Torque	0.5 Nm	7 lb-in	
Accessories	CAR-IND		
Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	EN 4332	2.5sqmm - 450V - 16A - 85 °C	EN60998-1; EN60998-2-1
	121269 ÜG	2.5sqmm - 450V - 16A - 85 °C	DIN EN60998-1; DIN EN60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 7	26 ÷ 14AWG - 300V - 15A - 140 °C	UL1059
	LR 40455	26 ÷ 14AWG - 300V - 15A	CSA C22-2 N.158-1987; E.C.N 584B

DIMENSIONAL
DRAWING

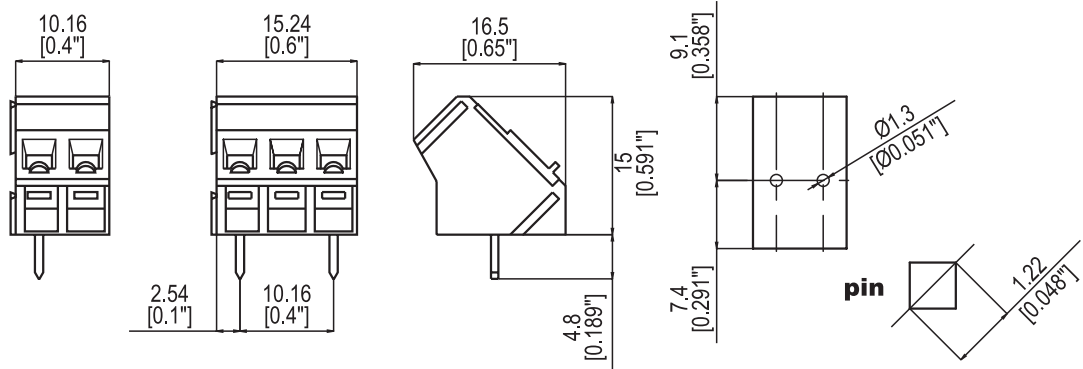





PA251 – 10.16

ACCESSORIES

CAR-IND

Self adhesive label of ten symbols.
Package of 10 sheets each with 25 labels.



PACKAGING

Type	P-N	Pack
PA 251/10.16/1	00110371	100
PA 251/10.16/2	00110372	100

CAR-IND

Type	P-N	Pack
L1, L2, L3, N, PE, U, V, W, N,	00080498	250
Neutral	00080499	250
1+ 10	00080500	250
11+ 20	00080501	250
21+ 30	00080502	250
31+ 40	00080503	250
41+ 50	00080504	250
51+ 60	00080505	250
61+ 70	00080506	250
71+ 80	00080507	250
81+ 190	00080508	250
91+ 100	00080509	250

PALLETS

Europallets

