


TAICOM type TFC

Flat, UL recognised cable suitable for use with insulation displacement connectors (I.D.C.). Covered by grey flame retardant P.V.C. The 28 a.w.g. stranded (7/0.127mm) conductors are spaced on the standard 0.050in (1.27mm) pitch and easily split to requirement. Supplied on 100ft (30.5m) reels.

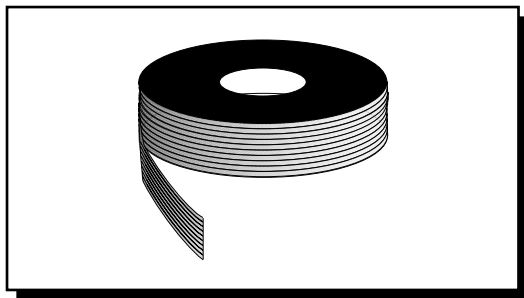

- Suits **I.D.C.** connectors
- Pitch **0.050in** (1.27mm)
- Conductors **28 a.w.g.** (7/0.127mm)
- Flame retardant P.V.C. insulation
- Colour **Grey** with marker
- Choice of ways
- UL recognised
- **100ft** (30.5m) reels

UL recognised style 2651, flame test VW-1. Identification marker along one side.



Type	Manf. Part No.	Order Code
9 way	TFC09G	670009
10 way	TFC10G	670010
14 way	TFC14G	670014
16 way	TFC16G	670016
20 way	TFC20G	670020
25 way	TFC25G	670025
26 way	TFC26G	670026
34 way	TFC34G	670034
36 way	TFC36G	670036
40 way	TFC40G	670040
50 way	TFC50G	670050
64 way	TFC64G	670064

Specification

Conductors 28 a.w.g. stranded, tinned copper (7/0.127mm)
 Pitch 0.050in (1.27mm)
 Current rating 1A
 Voltage rating 300V
 Conductor resistance 237 /km max.
 Capacitance 40pF/m
 Insulation resistance (min) 1000M
 Operating temp. range -20 C to +105 C

SUPPLIED ON 100ft (30.5m) REELS

500ft (152.4m) REELS
Available to special order

N.B. IDC connectors and assembly tool are shown in the Connectors Section