


**PCB PLUGS - Latched headers**

Choice of mounting position with contacts gold over nickel plated. Fitted with long latches to accommodate strain relief bracket on cable sockets.

**Straight**

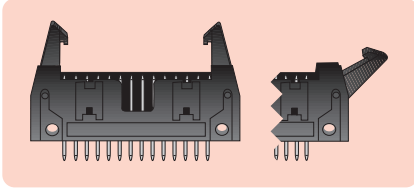


**Type**

- 10 way
- 14 way
- 16 way
- 20 way
- 26 way
- 34 way
- 40 way
- 50 way
- 60 way
- 64 way

**Manf. Part No. & anglia Order Code**

- T110LHS
- T114LHS
- T116LHS
- T120LHS
- T126LHS
- T134LHS
- T140LHS
- T150LHS
- T160LHS
- T164LHS

**Right Angle**

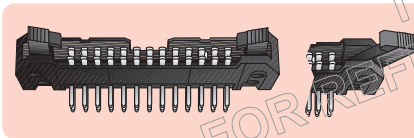

**Type**

- 10 way
- 14 way
- 16 way
- 20 way
- 26 way
- 34 way
- 40 way
- 50 way
- 60 way
- 64 way


**Manf. Part No. & anglia Order Code**

- T110LHR
- T114LHR
- T116LHR
- T120LHR
- T126LHR
- T134LHR
- T140LHR
- T150LHR
- T160LHR
- T164LHR

**PCB PLUGS - Boxed headers**

Choice of mounting position with contacts gold over nickel plated.

**Straight**




**Type**

- 10 way
- 14 way
- 16 way
- 20 way
- 26 way
- 34 way
- 40 way
- 50 way
- 60 way
- 64 way

**Manf. Part No. & anglia Order Code**

- T110BHS
- T114BHS
- T116BHS
- T120BHS
- T126BHS
- T134BHS
- T140BHS
- T150BHS
- T160BHS
- T164BHS

**Right Angle**



**Type**


- 10 way
- 14 way
- 16 way
- 20 way
- 26 way
- 34 way
- 40 way
- 50 way
- 60 way
- 64 way

**Manf. Part No. & anglia Order Code**

- T110BHR
- T114BHR
- T116BHR
- T120BHR
- T126BHR
- T134BHR
- T140BHR
- T150BHR
- T160BHR
- T164BHR

**CABLE SOCKETS**

Supplied complete with strain relief bracket. Contacts gold over nickel plated. Centre bump polarised.



**Type**

- 10 way
- 14 way
- 16 way
- 20 way
- 26 way
- 34 way
- 40 way
- 50 way
- 60 way
- 64 way

**Manf. Part No. & anglia Order Code**

- T110CS
- T114CS
- T116CS
- T120CS
- T126CS
- T134CS
- T140CS
- T150CS
- T160CS
- T164CS




**IDC**

continued overleaf >>>>>>

## TRANSITION - 2 row


For terminating ribbon cable directly to the pcb. Contacts gold over nickel plated.

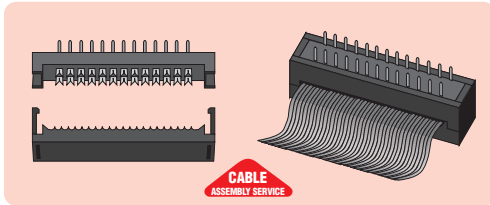

**CABLE ASSEMBLY SERVICE**

## DIL PLUGS

Suitable for inserting into an IC socket or terminating directly to the pcb. Contacts gold over nickel plated.

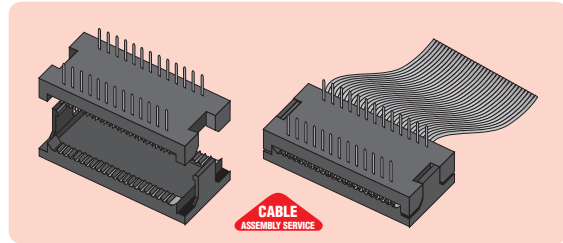

**CABLE ASSEMBLY SERVICE**

### Type

- 10 way
- 14 way
- 16 way
- 20 way
- 26 way
- 34 way
- 40 way
- 50 way
- 64 way

### Manf. Part No. & anglia Order Code

- T110TC**
- T114TC**
- T116TC**
- T120TC**
- T126TC**
- T134TC**
- T140TC**
- T150TC**
- T164TC**



### Type

- 8 way
- 14 way
- 16 way
- 18 way
- 20 way
- 24 way
- 28 way
- 40 way


### Manf. Part No. & anglia Order Code

- T108DP**
- T114DP**
- T116DP**
- T118DP**
- T120DP**
- T124DP**
- T128DP**
- T140DP**



### Dimensions (mm)




WAYS	A	B
10	17.8	10.2
14	22.9	15.2
16	25.4	17.8
20	30.5	22.9
26	38.1	30.5
34	48.3	40.6
40	55.9	48.3
50	68.6	61.0
64	86.4	78.7



### Dimensions (mm)




WAYS	A	B	C	D	H
8	15.7	7.6	11.1	7.6	7.8
14	23.3	15.2	11.1	7.6	7.8
16	25.9	17.8	11.1	7.6	7.8
18	28.4	20.3	11.1	7.6	7.8
20	31.0	22.9	11.1	7.6	7.8
24	36.0	27.9	18.7	15.2	6.1
28	41.1	33.0	18.7	15.2	6.1
40	56.4	48.3	18.7	15.2	6.1



**CABLE ASSEMBLY SERVICE**  
available on this range  
Refer to page 189

**TAICOM type TFC**

Flat, UL recognised cable suitable for use with standard pitch, insulation displacement connectors (IDC). Covered by grey flame retardant PVC. The 28 awg stranded (7/0.127mm) conductors are spaced on the standard 0.050in (1.27mm) pitch and easily split to requirement. Supplied on 100ft (30.5m) hexagonal reels with 500ft (152.4m) reels available to special order.

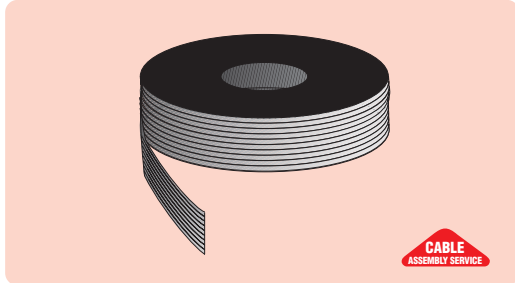

- ◆ Suits **IDC** connectors
- ◆ Pitch **0.050in** (1.27mm)
- ◆ Conductors **28 awg** (7/0.127mm)
- ◆ Flame retardant PVC insulation
- ◆ Colour **Grey** with marker
- ◆ Choice of ways
- ◆ UL recognised
- ◆ **100ft** (30.5m) length
- ◆ Supplied on **hexagonal** reels

UL recognised style 2651, flame test VW-1. Identification marker along one side.



**Specification**

Conductors .....	28 awg stranded, tinned copper (7/0.127mm)
Pitch .....	0.050in (1.27mm)
Current rating .....	1A
Voltage rating .....	300V
Conductor resistance .....	237Ω/km max.
Capacitance .....	40pF/m
Insulation resistance (min) .....	1000MΩ
Operating temp. range.....	-20°C to +105°C

Type	Manf. Part No. & Anglia Order Code
9 way	TFC09G
10 way	TFC10G
14 way	TFC14G
16 way	TFC16G
20 way	TFC20G
25 way	TFC25G
26 way	TFC26G
34 way	TFC34G
36 way	TFC36G
40 way	TFC40G
50 way	TFC50G
64 way	TFC64G

**500ft (152.4m) REELS**  
Available to special order



**CEL** CABLE ACCESSORIES

*A wide variety of these products are detailed in the Cables & Accessories section.*

- Cable ties & mounts
- Cable clamps & bushes
- Hole plugs
- Heat shrink tubing